
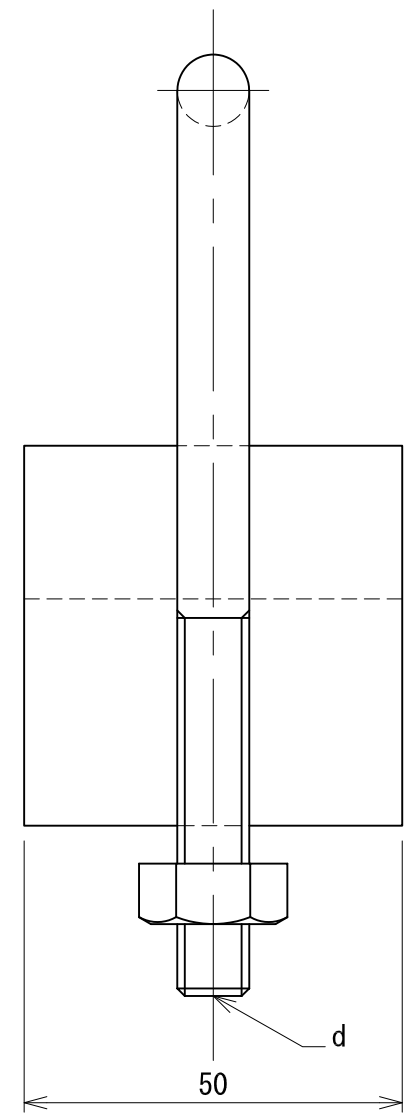



管径称	適合管外径 (A)	ねじ径 (d)	P			T20~T30		P		T40~T50	
			T20	T25	T30	L	E	T40	T50	L	E
15A	21.7	W5/16	31	31	31	72	44				
20A	27.2	W5/16	37	37	37	78	44	37	37	98	44
25A	34.0	W5/16	44	44	44	84	45	44	44	104	45
32A	42.7	W3/8	52	52	52	98	50	52	52	118	66
40A	48.6	W3/8	62	62	62	104	50	62	62	124	66
50A	60.5	W3/8	74	74	74	115	50	74	74	135	66
65A	76.3	W3/8	88	88	88	137	55	88	88	157	66
80A	89.1	W3/8	101	101	101	147	55	101	101	167	66
100A	114.3	W3/8		126	126	175	55	126	126	195	66
125A	139.8	W1/2		154	154	205	65	154	154	225	65
150A	165.2	W1/2		182	182	230	65	182	182	250	65
200A	216.3	W1/2			232	282	65	232	232	302	65
250A	267.4	W5/8			286	338	80	286	286	358	80
300A	318.5	W5/8						341	341	418	90

※T20~T30は足長Uボルト(30長)、T40~T50は足長Uボルト(50長)を使用

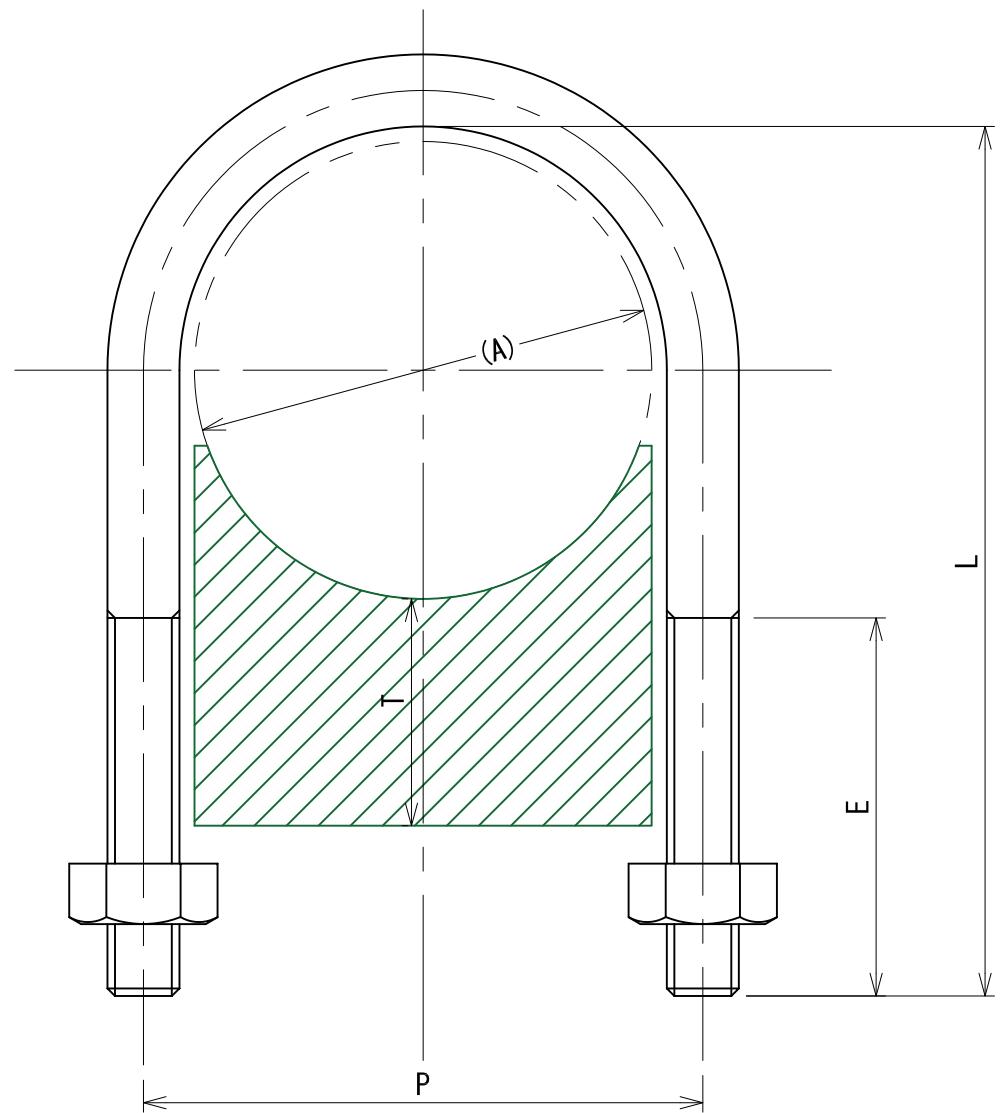

承認	検図	名称 ウレタンEP 15~300A		
		材質 SPCC	表面処理 電気亜鉛めっき	尺度 1:1
設計	製図	板厚	単重	角法 第三角法
		図番 10200040209		RevNo. 0-3
 日栄インテック株式会社 管材事業部				SHEET A3